
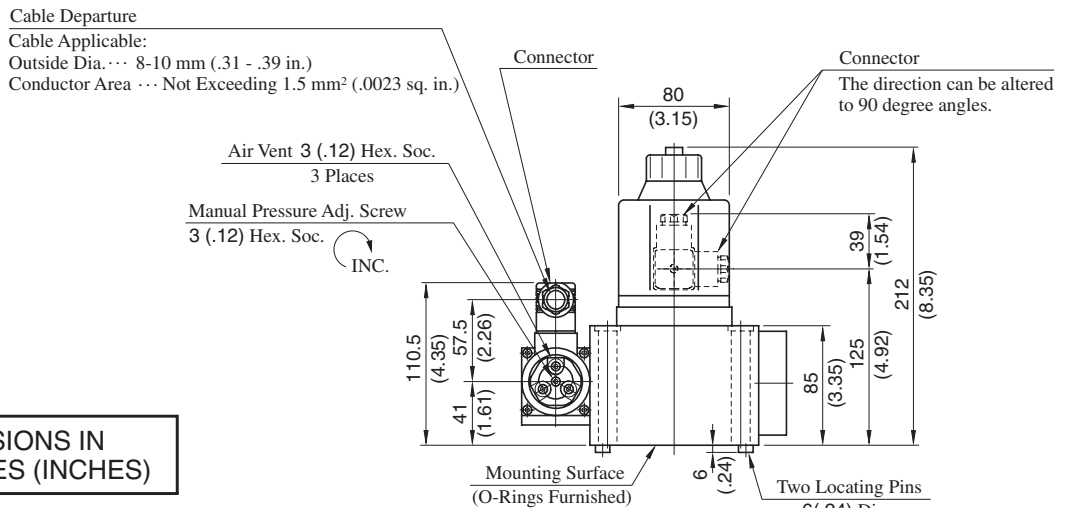


**Models with Proportional Pilot Relief Valve**

EFBG-03-125-<sup>C</sup><sub>H</sub>-17/1790

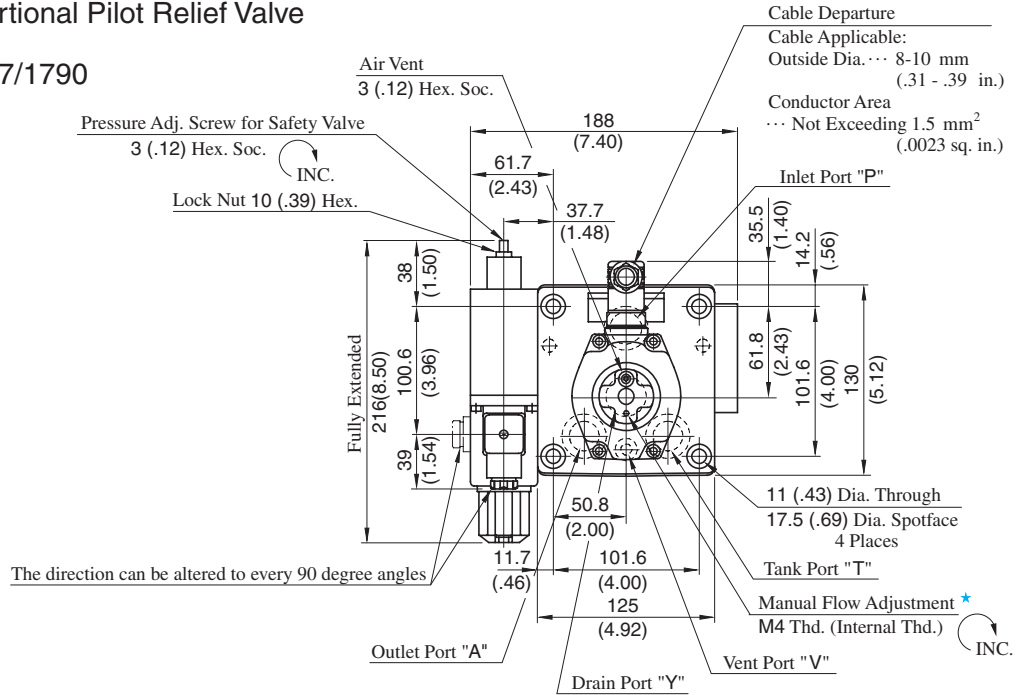


**DIMENSIONS IN MILLIMETRES (INCHES)**

★ Manual flow adjustment can be done by screwing for example an M4×20L screw in the M4 thread or pushing in a rod etc. there.

Approx. Mass ..... 16 kg (35.3 lbs.)

**Models without Proportional Pilot Relief Valve**

EFBG-03-125-17/1790


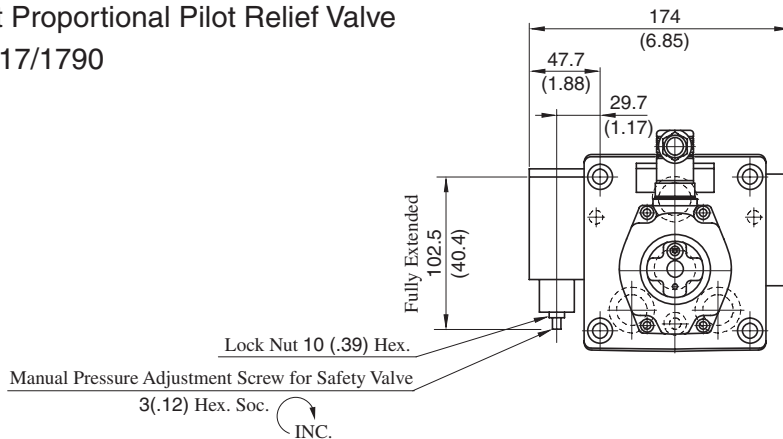


Approx. Mass ..... 14 kg (30.9 lbs.)

● For other dimensions, please refer to the models with proportional pilot relief valve.

Models with Proportional Pilot Relief Valve

EFBG-06-250-<sup>C</sup><sub>H</sub>-17/1790

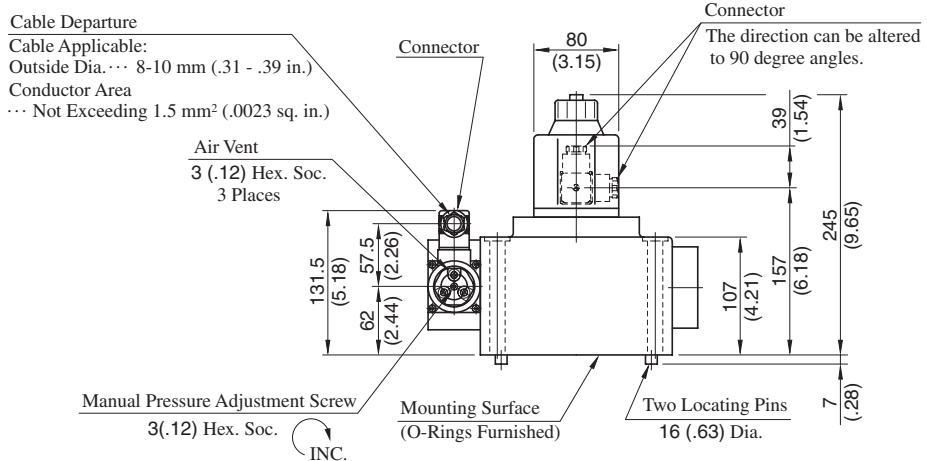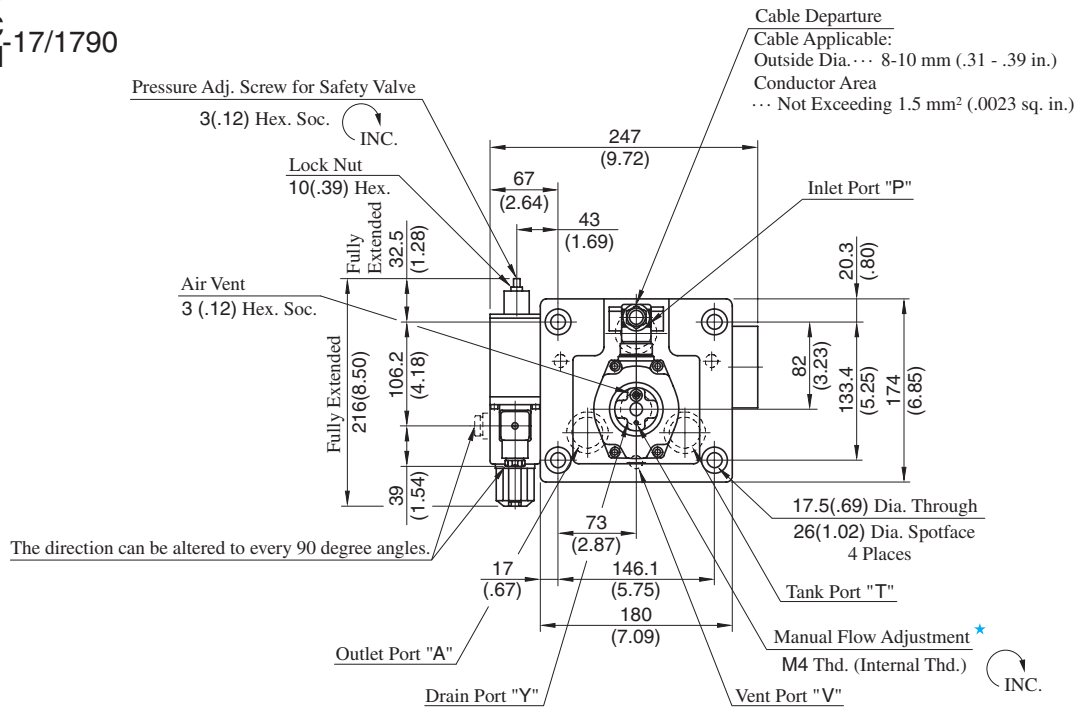


Approx. Mass ..... 30 kg (66.2 lbs.)

**DIMENSIONS IN MILLIMETRES (INCHES)**

★ Manual flow adjustment can be done by screwing for example an M4×20L screw in the M4 thread or pushing in a rod etc. there.

Models without Proportional Pilot Relief Valve

EFBG-06-250-17/1790

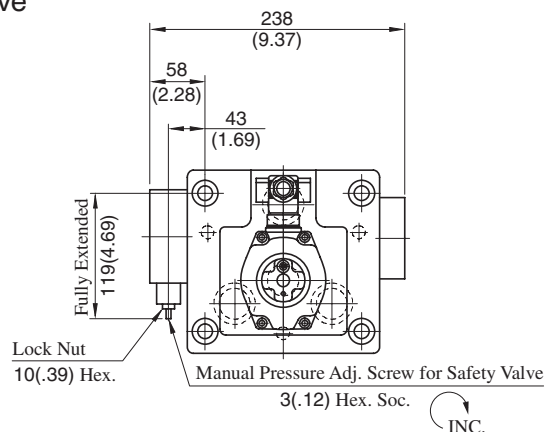

Approx. Mass ..... 28 kg (61.7 lbs.)

• For other dimensions, please refer to the models with Proportional Pilot Relief Valve.



**H**



**E Series**  
40Ω-10Ω Series Flow Control and Relief Valves

**Models with Proportional Pilot Relief Valve**

**EFBG-10-500-<sup>C</sup><sub>H</sub>-17/1790**

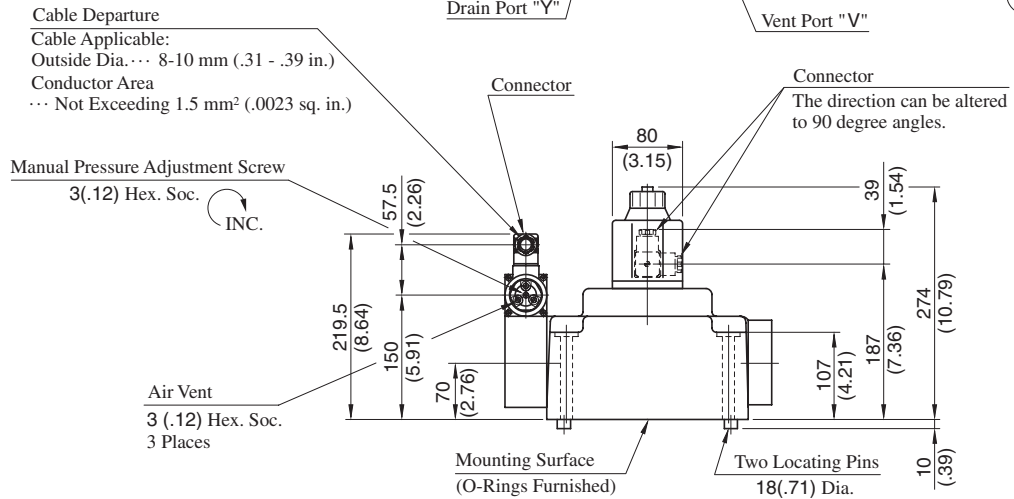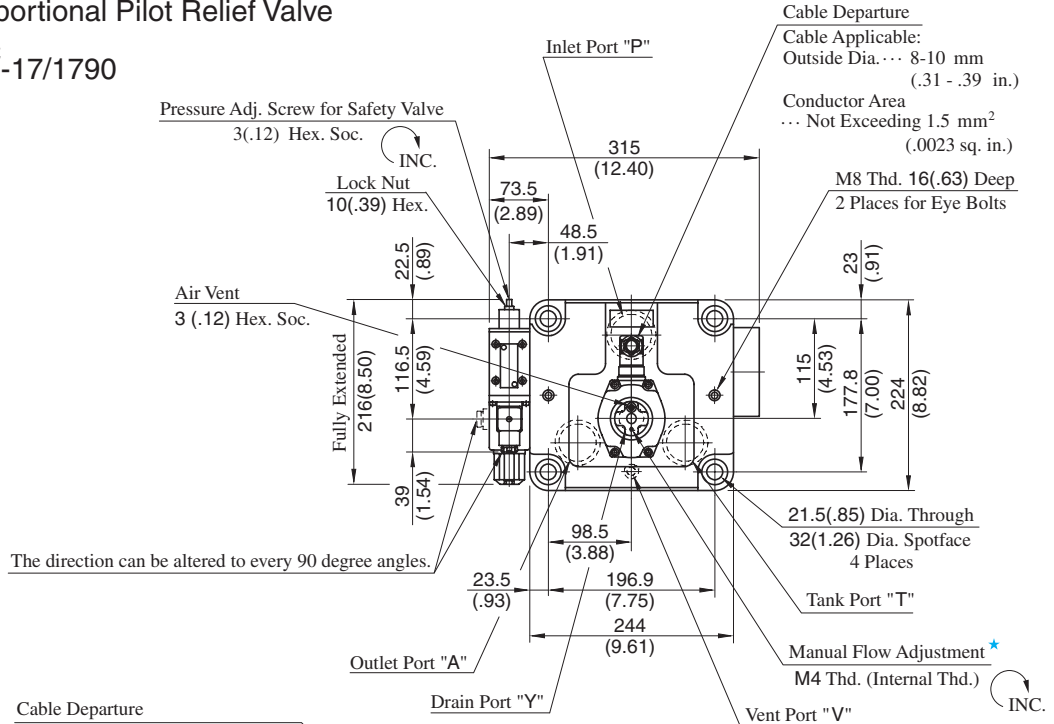


**DIMENSIONS IN MILLIMETRES (INCHES)**

Approx. Mass ..... 60 kg (132 lbs.)

★ Manual adjustment can be done by screwing for example an M4×20 L screw in the M4 thread or pushing in a rod etc. there.

**Models without Proportional Pilot Relief Valve**

**EFBG-10-500-17/1790**

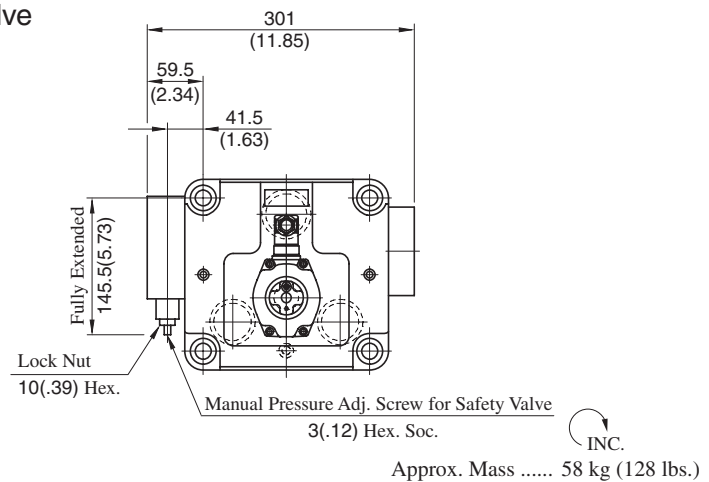

• For other dimensions, please refer to the models with Proportional Pilot Relief Valve.